STATIONARY12V SOURCE POD / ONE ALLOCATION

Not a manufactured minimum housing. Old5V collar is comparison only; new12V rotor board is not integrated.

TOP X/Y projection - equal scale2.7 drawing points/mm. All stated dimensions inmm.

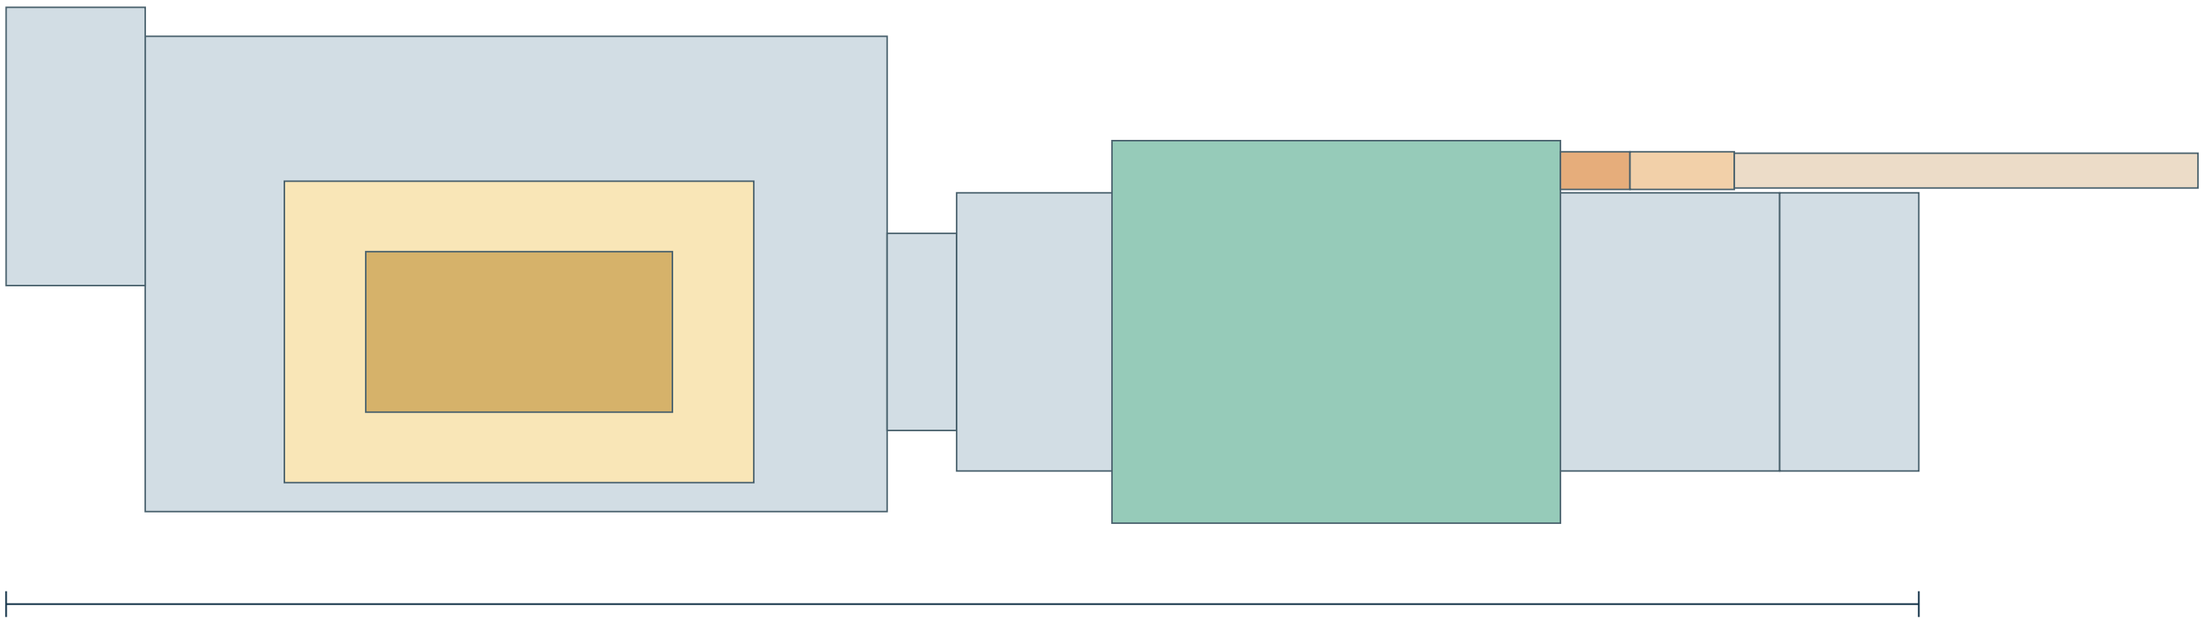

Pod shell128 x82 x62; input blank offsetY32,Z-15, Ø48 x24.

Whole product including collar/endcap blanks:330L x89W x72H.

Bounds X-164..166 / Y-33..56 / Z-39..33. No universal connector/fixture-fit claim.

Collar comparisonØ66; released sweep startsX26.8. Sourcepod/neck endsX0:26.8 axial gap.

Only isolatedLV rotates.13 detents at15degrees; ±90degree range inherited unchanged.

Actual frozen USB body allocation endsX104.17; this is NOT its exact mating plane.

Engineering approach:12mm plug +18mm relief +80mm cable; far endX214.17.

Product plus finite cable screen spans378.17mm. No cable supplier profile or bend approval.

–X pod placement clears the USB approach throughout181 angles; output blank remains a gate.

Carrier supports, terminal transitions and final fixed-clamp radial exit are visible unimplemented interfaces. Neither wire continuity nor mains construction approval follows from this layout.

Solid/spacing/motion evidence:checks.json. Exact allocations and scope labels:editableFCStd +STEP.

SOURCE POD / Y-Z SECTION AT X-75

Equal scale7 drawing points/mm; hidden pin projection is a bounding reservation, not actual leads.

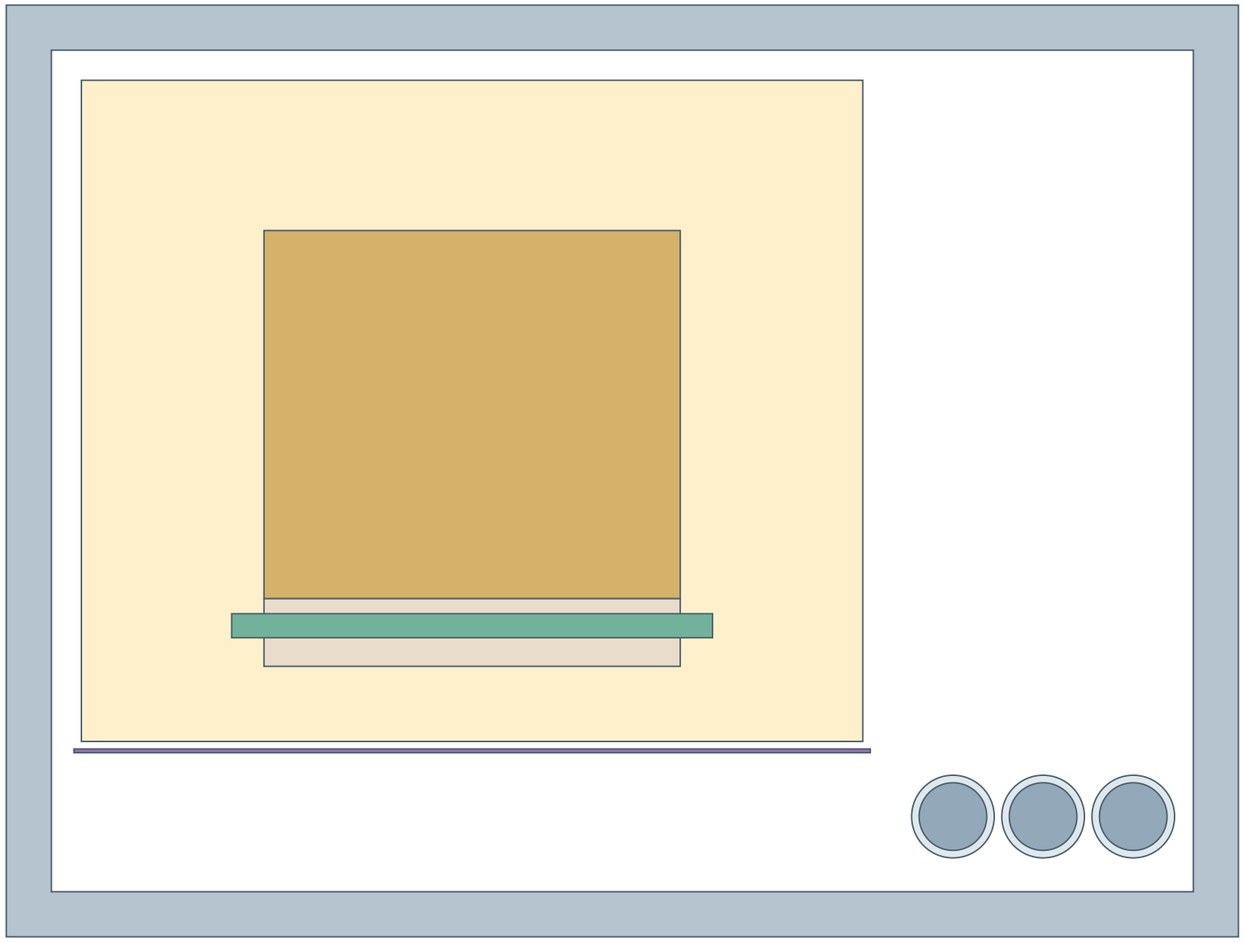

SOURCE REQUIREMENTS / CACHED PRIMARY

10mm around general unit;5mm bottom +Mylar.

Planning whole-carrier box81 x52 x44.

Maximum module52.9 x27.7 x24.5.

Maximum pin projection4.5 below body.

Actual pins/carrier/solder/retention NOT released.

ENGINEERING ALLOCATIONS

+/-0.5 envelope beyond planning box.

Film0.25; chosen grade/retention unqualified.

Shell3mm nominal; material/thermal gates.

TrunkØ4.5, centrelineR12; +0.5 radial space.

Trunk below reservation, not through it.

Primarybranch R8 bend-space only; no fuseMPN.

Bottom reservation surfaceZ-20; maximum pin tipZ-15 ->5mm. Film topZ-20.5 adds0.5 allocation.

Maximum body topZ14 -> reserved topZ24:10mm. CarrierY±16 -> reservationY±26:10mm.

L/N/PE axes atY32/38/44,Z-25 in pod; nominal upper wire surfaceZ-22.75 lies below reservation.

Support zones are outside the reservation. Their bridge/attachment to the carrier is NOT designed.

Primary interface stopsX-116.5 versus carrier edge-106:10.5mm construction gap explicitly open.

Secondary interface startsX-34.5 versus carrier edge-45:10.5mm construction gap explicitly open.

The terminal transitions cannot be treated as permission to fill the insulation space with trunk/joints.

Thermal, ventilation, adjacent fixture heat, film/safety construction and variant endcaps remain unqualified.